

Alvium

FP3-234 STP



- IMX249 CMOS sensor
- 2.4 MP resolution
- ALVIUM image processing
- FPD-Link III interface
- Various hardware options

Model without hardware options

Robust CSI-2 based Alvium cameras with FPD-Link III interface

Benefit from greater flexibility in cable lengths

Alvium FP3 STP cameras with FPD-Link III (Flat Panel Display Link) interface have been designed to overcome the limitations of standard CSI-2 cameras. The closed housing CSI-2 based cameras come with integrated serializer and a rugged HSD STP connector for cable lengths up to 10 meters. This connection can also be used to power cameras (Power over STP), enabling single cable solutions.

To operate Alvium FP3 cameras on your vision system, Allied Vision provides different access modes: - **GenICam for CSI-2 Access** controls the camera by GenICam features, using the Alvium CSI-2 driver and CSI-2 transport layer (TL) directly. All Alvium FP3 STP models with equivalent 1800 C models are supported. Please find FAQs and installation instructions in the [Getting Started with GenICam for CSI-2](#) application note. - **Direct Register Access (DRA)** to control the cameras via registers for advanced users. - **Video4Linux2 Access** allows to control the cameras via established V4L2 API and applications like GStreamer and OpenCV. Open-source CSI-2 drivers are available on [GitHub](#) for different boards and systems on chip (SoCs).

In addition to lens mount and housing options, see [Customization and OEM Solutions webpage](#) for additional options.

Specifications

| | |
|------------------------------------|---------------------------------------------------|
| Interface | FPD-Link III, based on MIPI CSI-2, up to 4 lanes |
| Resolution | 1936 (H) × 1216 (V) |
| Spectral range | 300 to 1100 nm |
| Sensor | Sony IMX249 |
| Sensor type | CMOS |
| Shutter mode | GS (Global shutter) |
| Sensor size | Type 1/1.2 |
| Pixel size | 5.86 μm × 5.86 μm |
| Lens mounts (available) | C-Mount, CS-Mount |
| Max. frame rate at full resolution | Mainly depends on hardware and register settings. |
| ADC | 12 Bit |
| Image buffer (RAM) | 256 KByte |
| Non-volatile memory (Flash) | 1024 KByte |

Output

| | |
|-------------------------|-------------------------------------------------------------|
| Bit depth | 12-bit |
| YUV color pixel formats | YUV422 8-bit (UYVY) [MIPI CSI-2 (FOURCC)] |
| RGB color pixel formats | RGB888 (RGB3) [MIPI CSI-2 (FOURCC)] |
| Raw pixel formats | RAW8 (GREY), RAW10 (Y10), RAW12 (Y12) [MIPI CSI-2 (FOURCC)] |


General purpose inputs/outputs (GPIOs)

| | |
|----------|----------------------|
| TTL I/Os | 2 programmable GPIOs |
|----------|----------------------|

Operating conditions/dimensions

| | |
|-----------------------------------|----------------------------------------------------------------|
| Operating temperature | -20 °C to +65 °C (housing) |
| Power requirements (DC) | 5 VDC over MIPI CSI-2 |
| Power consumption | Value for the integrated serializer adds to CSI-2 model value. |
| Mass | 70 g |
| Body dimensions (L × W × H in mm) | 41 × 29 × 29 |

Quantum efficiency

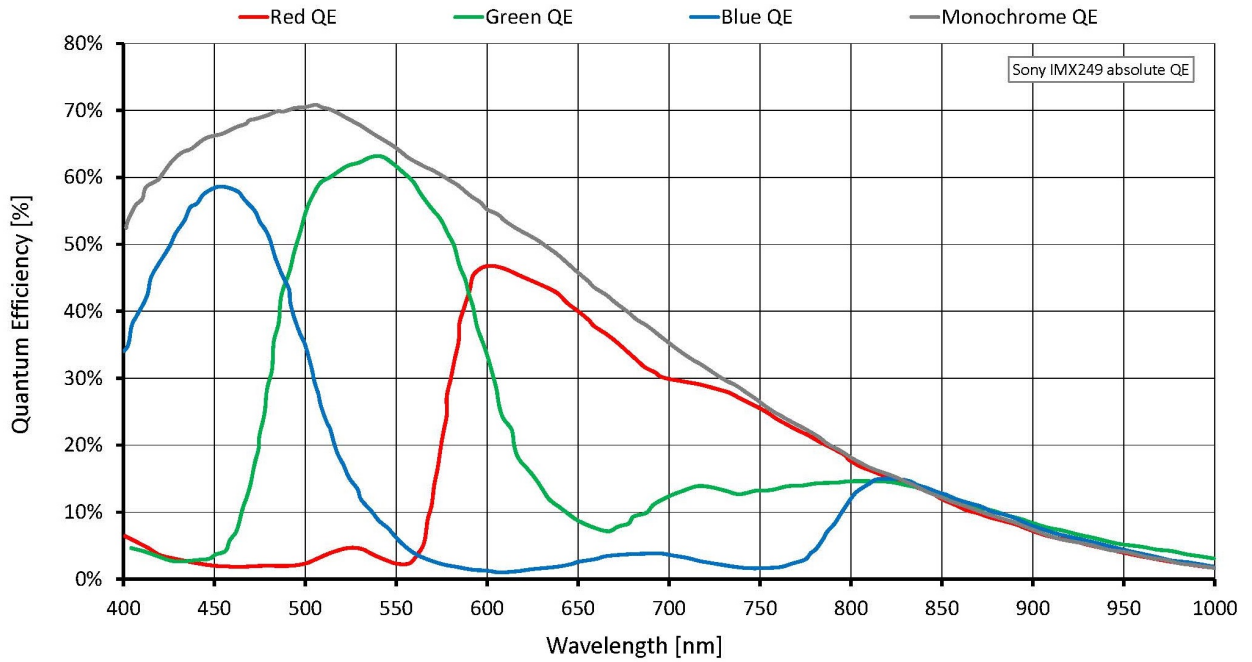

Features

Image control: Auto

- Auto exposure
- Auto gain
- Auto white balance (color models)

Image control: Other

- Adaptive noise correction*
- Binning*
- Black level
- Color transformation (incl. hue, saturation; color models)
- Contrast*
- Custom convolution*
- De-Bayering up to 5×5 (color models)
- DPC (defect pixel correction)
- Gamma
- LUT (look-up table)*
- Reverse X/Y
- ROI (region of interest)
- Sharpness/Blur*

Camera control

- Acquisition frame rate
- Bandwidth control*
- Counters and timers*
- Firmware update in the field
- I/O and trigger control
- Readout modes (SensorBitDepth)*
- Serial I/Os*
- Temperature monitoring
- User sets*

*GenICam for CSI-2 Access

Technical drawing

