

- IMX487 CMOS sensor
- GigE Vision
- High bandwidths
- 2 lens mount options

Model without hardware options

### Alvium G5 - Speed up your vision application

5GigE Vision camera for demanding applications

Alvium G5-812 UV with Sony IMX487 runs 58 frames per second at 8.1 MP resolution.

The Alvium G5 camera series combines the advantages of the 5GigE interface for higher bandwidth and the flexibility of the Alvium platform offering various mount and sensor options. It enables an easy upgrade of existing systems (USB3 Vision or GigE Vision) and offers backwards compatibility with 1000BASE-T solutions. Powered by ALVIUM® Technology, the sugar cube Alvium G5 camera delivers highest image quality at a low power consumption.

Easy software integration with **Vimba X** and compatibility to the most popular third party image-processing libraries.

## Specifications

|                                    |                                                                                             |
|------------------------------------|---------------------------------------------------------------------------------------------|
| Interface                          | IEEE 802.3: 5GBASE-T or 2.5GBASE-T (NBASE-T) and 1000BASE-T, IEEE 802.3af Power Class 0 PoE |
| Resolution                         | 2848 (H) × 2848 (V)                                                                         |
| Spectral range                     | 200 to 1000 nm                                                                              |
| Sensor                             | Sony IMX487                                                                                 |
| Sensor type                        | CMOS                                                                                        |
| Shutter mode                       | GS (Global shutter)                                                                         |
| Sensor size                        | Type 2/3                                                                                    |
| Pixel size                         | 2.74 µm × 2.74 µm                                                                           |
| Lens mounts (available)            | C-Mount, CS-Mount                                                                           |
| Max. frame rate at full resolution | 58 fps at 525 MByte/s, Mono8                                                                |
| ADC                                | 12 Bit                                                                                      |
| Image buffer (RAM)                 | 512 MByte                                                                                   |
| Non-volatile memory (Flash)        | 1024 KByte                                                                                  |

### Output

|                          |                                                                 |
|--------------------------|-----------------------------------------------------------------|
| Bit depth                | 12-bit                                                          |
| Monochrome pixel formats | Mono8 (default), Mono10, Mono10p, Mono12, Mono12p, Mono12Packed |


### General purpose inputs/outputs (GPIOs)

|                    |                   |
|--------------------|-------------------|
| TTL I/Os           | 2 GPIOs (LVTTTL)  |
| Opto-isolated I/Os | 1 input, 1 output |

### Operating conditions/dimensions

|                                   |                                                                                  |
|-----------------------------------|----------------------------------------------------------------------------------|
| Operating temperature             | -20 °C to +60 °C housing temperature                                             |
| Power requirements (DC)           | 10.8 to 26.4 VDC AUX   IEEE 802.3af, Power Class 0 PoE                           |
| Power consumption                 | External power: 7.2 W at 12 VDC (typical)   Power over Ethernet: 7.6 W (typical) |
| Mass                              | 100 g                                                                            |
| Body dimensions (L × W × H in mm) | 60 × 29 × 29                                                                     |

## Quantum efficiency

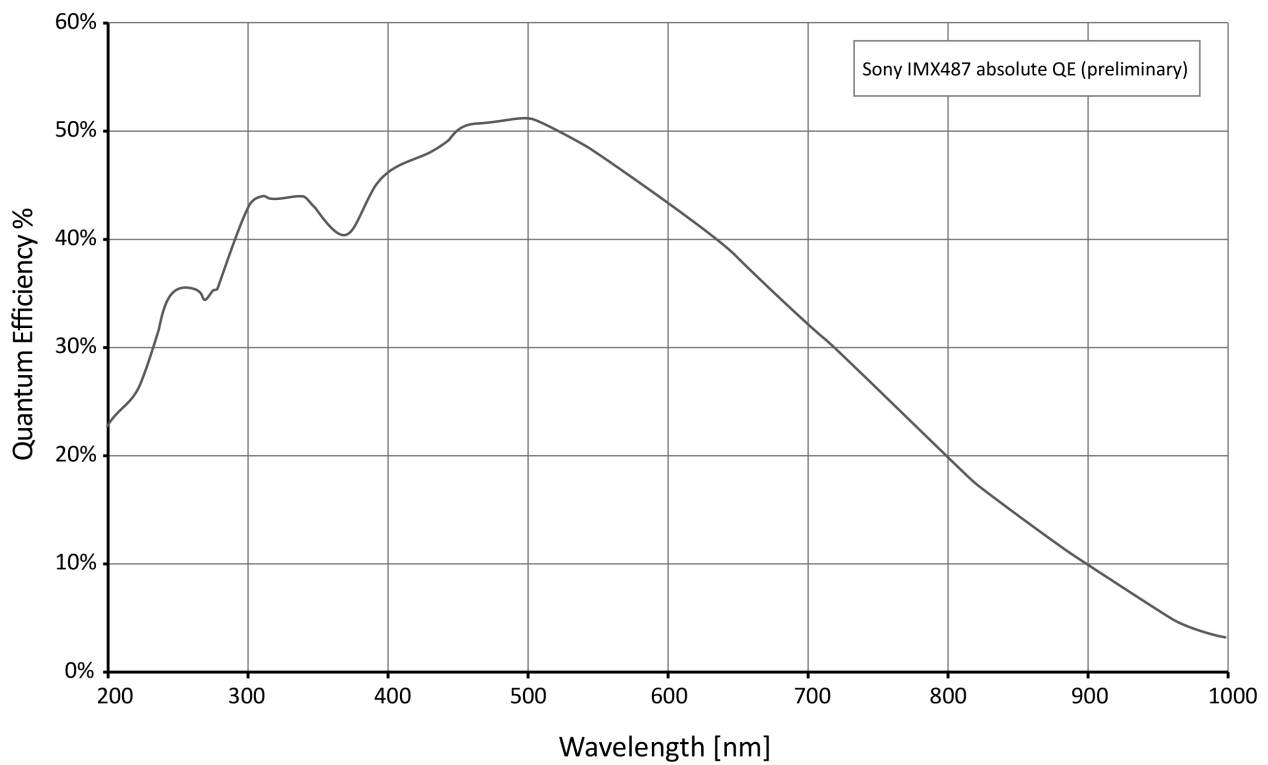

## Features

### Image control: Auto

- Auto exposure
- Auto gain

### Image control: Other

- Adaptive noise correction
- Binning: Digital
- Binning: Sensor (mono models)
- Black level
- Contrast
- Custom convolution
- DPC (defect pixel correction)
- FPNC (fixed pattern noise correction)
- Gamma
- Lens shading correction
- LUT (look-up table)
- Multiple ROIs (regions of interest)
- Reverse X/Y
- ROI (region of interest)
- Sharpness/Blur

### Camera control

- Acquisition frame rate
- Action commands, incl. ToE (trigger over Ethernet)
- Bandwidth control
- Burst mode
- Counters and timers
- Event channel
- Firmware update in the field
- I/O and trigger control
- Image chunk data
- Power Saving Mode
- PTP (IEEE 1588 Precision Time Protocol)
- Sequencer
- Serial I/Os
- Temperature monitoring
- User sets

# Technical drawing

